



## Compu-Spread SCDX

### Sander Control with Directional Valves

Issue V02: 2018.07

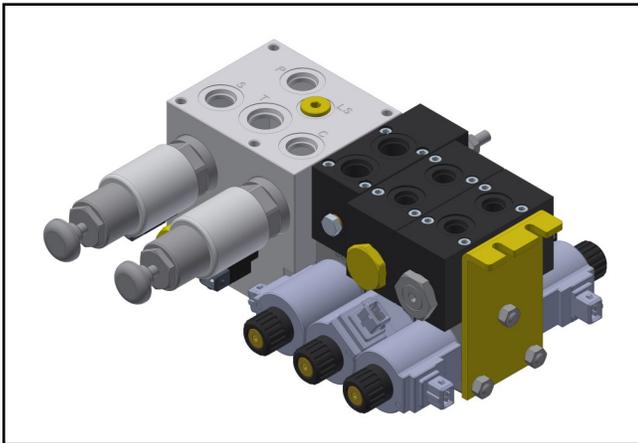

Sander control hydraulic manifold assembly type SCDX with integrated spinner and conveyor control valves and 3 directional control valves for hoist (dump) and 2 plow functions

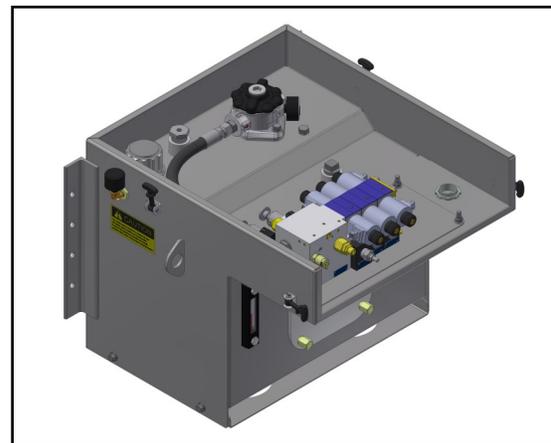

Sander control hydraulic manifold type SCDX installed in a Rexroth VTM-76 side frame mount reservoir assembly, with return line and air filters, fluid level glass and cleanout cover. Shown without stainless steel enclosure cover.

Rexroth's SCDX manifold assemblies are designed to control the functions used on mid-size Snow & Ice Control vehicles. The base block controls the spinner and auger or conveyor. Accurate speed control of these hydraulic motors is provided by the use of pressure compensated proportional valves. Up to four hydraulic valve slices—with on/off or proportional solenoids—can be added to control double or single acting functions, such as dump, plow up/down or left/right, or box tilt. A secondary block on each valve slice contains any load holding or port relief valves which may be required. The load sensing SCDX is available for open and closed-center systems, with primary system pressure relief integral to both versions.

Open-center systems (with fixed displacement pump) have an unloading valve which directs pump flow to tank when no functions are required. When activated, the load pressure signal is sent to the unloader such that system pressure is just above load pressure, ensuring the maximum efficiency possible with these circuits.

Closed-center systems (with variable displacement load sensing pumps) provide even higher system efficiency. In this version the load pressure signal is sent to the

Rexroth A1VO pump controller, so that it de-strokes at standby pressure when no functions are required.

Maximum environmental protection is provided when the manifolds are installed in an enclosure, such as the Rexroth valve tank module VTM-76.

### Features

- Hydraulic load sensing provides maximum energy efficiency, whether in open or closed-center version
- High performance cartridge valves provide accuracy, reliability and enhanced serviceability
- Modular directional valve slices provide location flexibility in a compact space
- Anodized aluminum manifold provides good environmental protection
- All main fluid ports are on one surface, facilitating plumbing to actuators and other devices
- When fitted in a Rexroth enclosure, each valve is pre-wired to a robust water-tight connector

## Technical Data

### Hydraulic

Maximum operating pressure	210 bar	3000 psi
Maximum inlet flow rate	56 L/min	15 USGPM
Maximum flow to spinner	13 L/min	3.5 USGPM
Maximum flow to conveyor	30 L/min	8 USGPM
Maximum flow to/from hoist	30 L/min	8 USGPM
Maximum flow to other functions e.g. plow (up/down, left/right)	15 L/min	4 USGPM
Secondary valves available on DCV functions	Counter-balance, pilot-operated check, electrical poppet, port or cross-port relief (some restrictions)	
Fluid	Mineral oil to DIN 51524 or ATF; refer to Rexroth data sheet RE 90220 for more details	
Fluid operating temperature range	-20° to 80° C	14° to 176° F
Fluid cleanliness recommendation	per ISO 4406 (c): 19/17/14	
Fluid viscosity	5 to 400 cSt (10 to 100 preferred)	42 to 2000 SUS (60 to 500 preferred)

### Fluid Connections—manifold

Pressure (P)	#8 SAE "O" Boss
Tank (T, T1)	#10 SAE "O" Boss
Conveyor (C)	#8 SAE "O" Boss
Spinner (S)	#8 SAE "O" Boss
Load sense port (LS)	#6 SAE "O" Boss
Gauge (GP)	#6 SAE "O" Boss

### Fluid Connections—directional valve(s)

Other DCV functions e.g. plow, hoist, etc.	#8 SAE "O" Boss
--	-----------------

### Electrical

Spinner/conveyor solenoids	12 VDC, 1,800 mA, 3.3 Ω @ 68°F	150 Hz PWM (dither) frequency
On/off directional valve coils	12 VDC, 2.15 A, 5.5 Ω @ 68°F	
Proportional directional valve coils	12 VDC, 1800 mA, 4 Ω @ 68°F	150 Hz PWM (dither) frequency

### Weight

Manifold and 3 DCV sections	9 kg	20 lbs.
Additional valve slices, per slice	1.7 kg	3.7 lbs.

### Environmental

Manifolds are made of aluminum, anodized after machining. All cartridge valves are suitable for outdoor use. Directional control valve housings are nodular iron, with some aluminum trim. Installation in a sealed enclosure will extend the life of all external surfaces and components, which would otherwise be exposed to the harsh environment found in snow and ice control applications.

N.B. All dimensions are approximate, intended for illustrative purposes only. Request a certified drawing before beginning construction or installation.

Bosch Rexroth Canada  
490 Prince Charles Drive S.  
Welland, ON L3B 5X7  
tel. +1 905 735 0510  
toll free +1 877 COMPU11  
info@boschrexroth.ca  
www.boschrexroth.ca/cs

© Bosch Rexroth Canada Corp.

This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. All products described in this data sheet are subject to normal aging and wear from usage. Subject to change